


# Ovzon P20 OTM

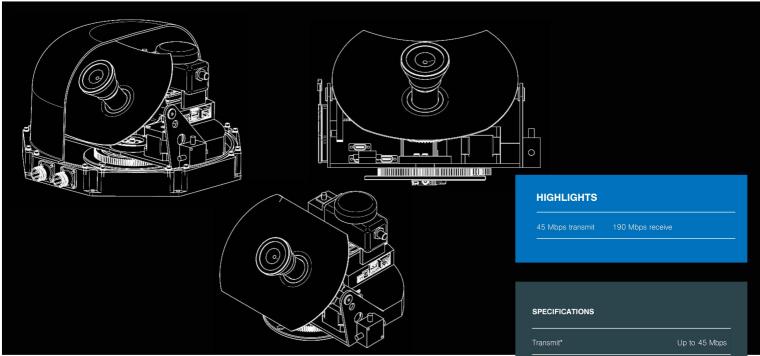

The Ovzon P20 is a small, ruggedized parabolic broadband satellite terminal that covers land, maritime, and airborne mobility applications.

The Ovzon P20 is ruggedized and optimized for applications on land, at sea, or in the air and for rapid deployment tasks. The terminal is ideal for use in demanding environments such as helicopters, boats, and vehicles. The Ovzon P20's shape, size, and weight make it an excellent choice for unmanned aerial vehicles (UAVs).

#### Ease of use

Time is critical when operations are conducted in challenging situations. The Ovzon P20 is designed for optimal user experience and high data rate capacity. The terminal can provide the user with almost immediate connectivity (<60 seconds) to transmit data rates up to 30 Mbps and receive up to 50 Mbps.

### Ovzon SATCOM-as-a-Service includes:

- Ovzon airtime
- Ovzon terminal OTP and OTM
- Internet gateway access
- Terrestrial Backbone connectivity
- 24/7 customer support

## **Ovzon Satellite Services**

Ovzon offers three categories of satellite services with global reach using Ovzon's satellite network.

- Ovzon Pegasus, our advanced, customized, high-performance service developed for the critical tasks of the most demanding customers.
- Ovzon Hero, our advanced, customized high-performance service developed for the critical tasks of the most demanding customers.
- Ovzon Go, our flexible service for fixed usage model and committed information rates.
- Ovzon Plus, our essential service which offers flexible throughput rates as well as per GB data packages.

Transmit*	Up to 45 Mbps
Receive*	Up to 190 Mbps
User Interface	Web GU
Data Interface	Ethernet (cable
Dimensions	H/0
Land, maritime	180 / 290 mm, 7.1 / 11.4 i
Airborne w/o radome	160 / 290 mm, 6.3 / 11.4
	ng, fiberglass radome 6.0 kg, 13.2
Land: Vehicle mounting Maritime: Mast mountir	ng, fiberglass radome 6.0 kg, 13.2 ing, w/o radome 4.0 kg, 8.8
Land: Vehicle mounting Maritime: Mast mountin Airborne: Hatch mount	ng, fiberglass radome 6.0 kg, 13.2 ing, w/o radome 4.0 kg, 8.8 >=30
Land: Vehicle mounting Maritime: Mast mountin Airborne: Hatch mount Angular Velocity ° / S	ng, fiberglass radome 6.0 kg, 13.2 ing, w/o radome 4.0 kg, 8.8 >=30
Land: Vehicle mounting Maritime: Mast mountin Airborne: Hatch mount Angular Velocity ° / S Environmental	g, MIL radome 5.0 kg, 11.0 ing, fiberglass radome 6.0 kg, 13.2 ing, w/o radome 4.0 kg, 8.8 >=30
Land: Vehicle mounting Maritime: Mast mounting Airborne: Hatch mount Angular Velocity ° / S Environmental Temperature	ng, fiberglass radome 6.0 kg, 13.2 ing, w/o radome 4.0 kg, 8.8 >=3(

Ovzon

Sweden, Phone: +46 8 508 600 60

VA 20171, United States, Phone: +1 703 276 3333,

E-mail: sales@ovzon.com, www.ovzon.com